



SIMPLER SMARTER THAN EVER

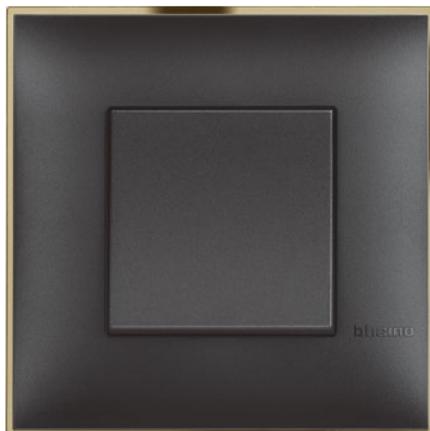

— Classia —

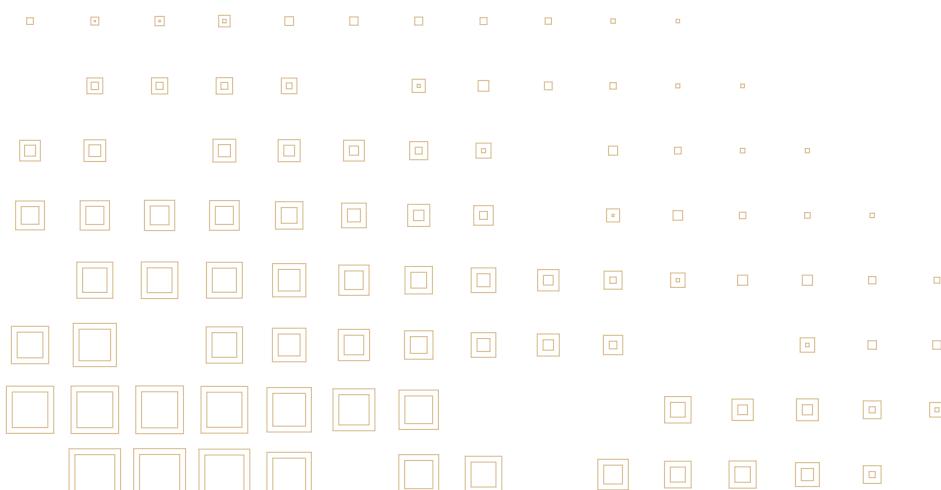

bticino



Classia

- 2 **SIMPLE** SHAPE
- 6 **SIMPLE** CHOICE
- 8 **SMART** SOLUTION
- 10 **SMART** INSTALLATION
- 14 CATALOGUE

SIMPLY SHAPE



A modern pure shape, defined by an accurate outline which contrasts with a gently curved surface. The frame gives a unique touch to your switch.






Two finishes of shiny white
and black satin devices

Frame from tone to tone
effects to metal gold,
chrome, nickel



A modern pure shape,
defined by an accurate
outline contrasts
with a gently curved volume



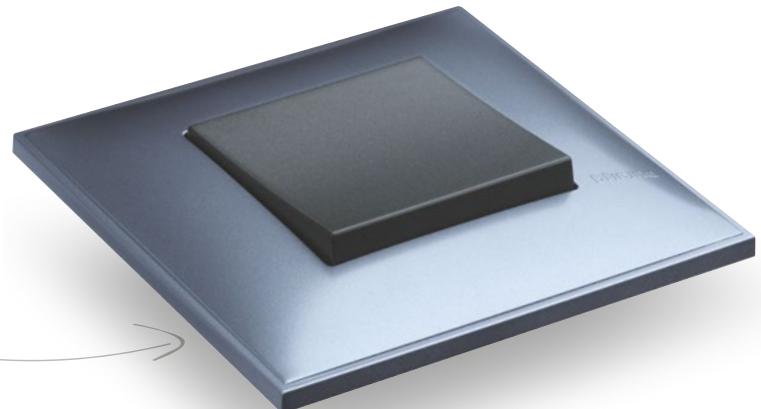


SWITCH: 2 DIFFERENT VERSION
Not lightable: always uniform aesthetic
Lightible with led included: advantage
to have a clear, intense bright beam



16 plate finishes to match with
2 different colors of controls:
white glossy - black satin.
The richness grows with
the richness of frame from tone
to tone effects to metal gold,
chrome, nickel.

SIMPLY CHOICE

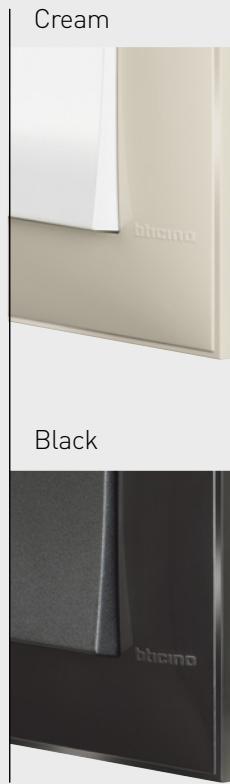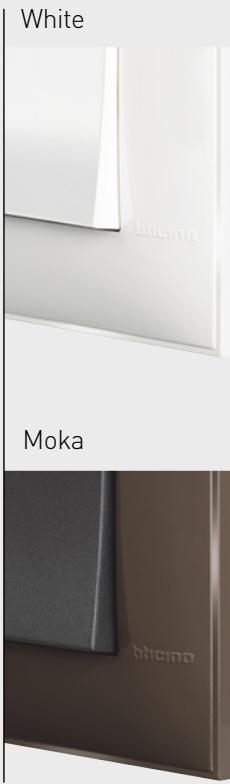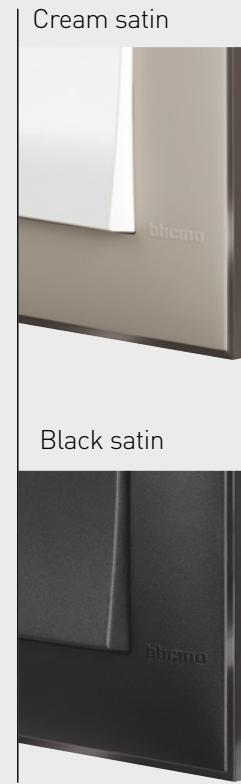BASICS**FINISHES****FRAMES****ACCENTS**

A unique and complete offer with all the modular systems: Italian and European standard.

SMART SOLUTION




TWO MODULES
European standard



THREE MODULES
Italian standard

ALL POSSIBLE COMBINATIONS

6 For European installation system - up to 5 gangs

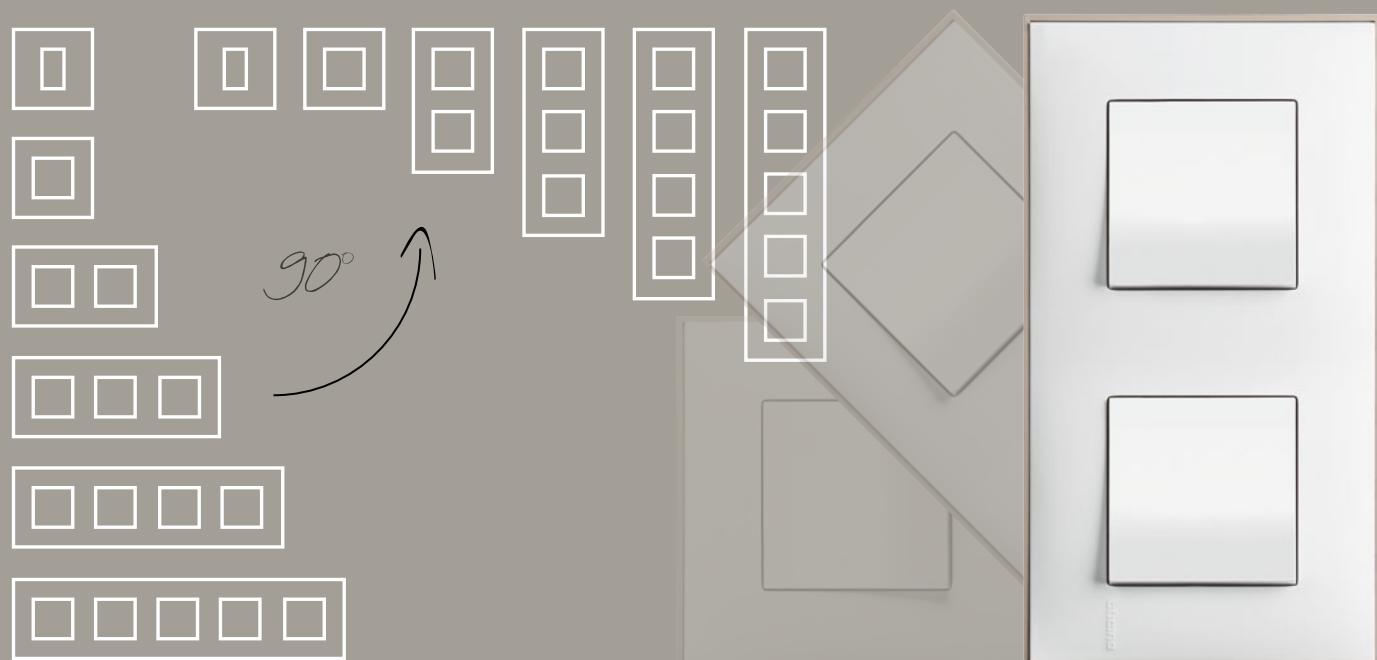

5 For Italian installation system



High performance and quality that gives a perfect installation in any kind of box and wall. Cover plates designed to match both Italian and European standard.

SMART INSTALLATION



INSTALLATION SYSTEM

- Innovative cover plates regulation system guarantee plate flush on the wall
- Easy installation and removal of devices


Screw fixing support

PLASTERBOARD INSTALLATION:

- Frame to be removed on plasterboard wall to guarantee the perfect alignment of cover plates and switches flush on the wall.

METAL INSERT:

- It makes the support rigid.
- The metal eyelets guarantee a better fixing of the screws.

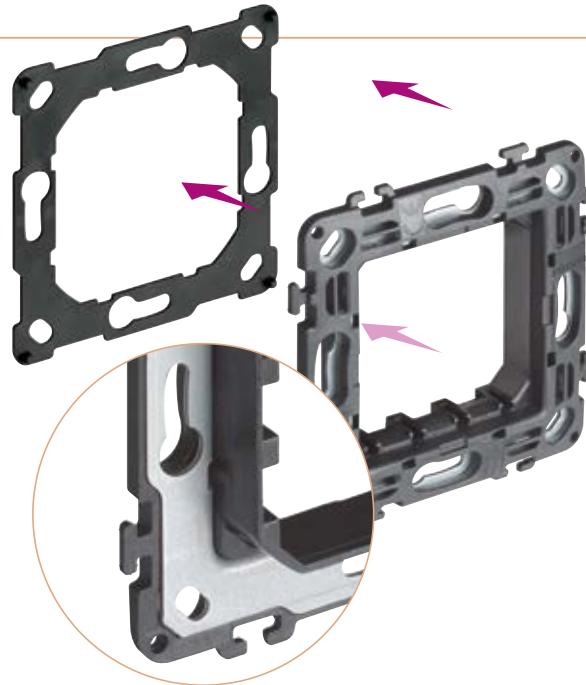


Support with clips



Innovative docking system for multiple installations.


If needs you can remove the clips and install the support with the screw.

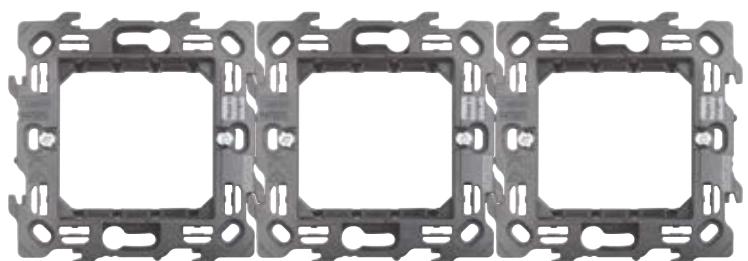

Perfect alignment due to a self-supporting hooking system. High resistance due to special material

CLASSIA

Switches

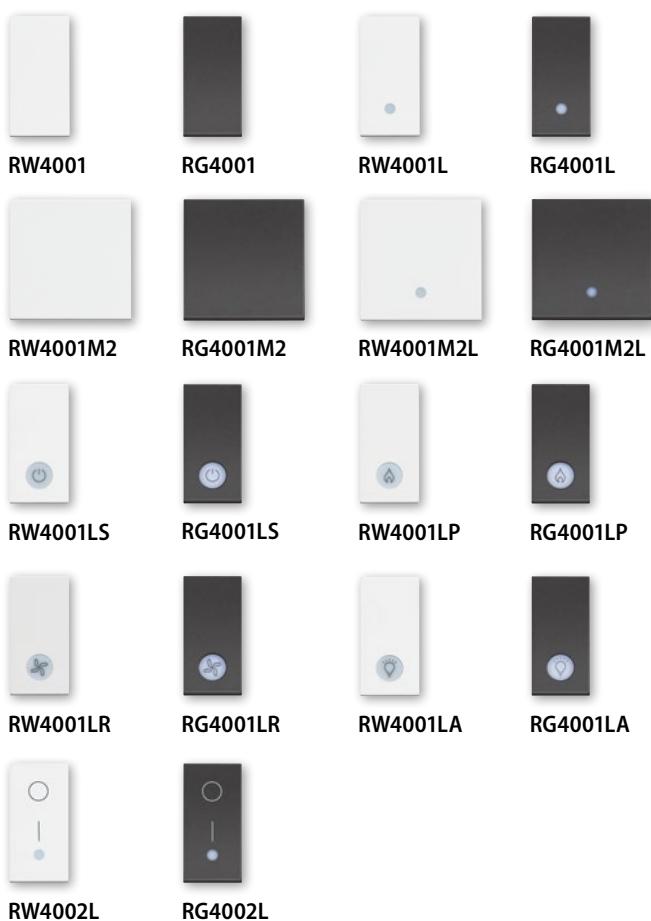

| Item | ONE-WAY SWITCHES |
|---|--|
| <input type="checkbox"/> RW4001 | 1P 10 AX - 250 Va.c. - 1 module - white |
| <input checked="" type="checkbox"/> RG4001 | as above - black |
| <input type="checkbox"/> RW4001L | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4001L | as above - black |
| <input type="checkbox"/> RW4001M2 | 1P 10 AX - 250 Va.c. - 2 modules - white |
| <input checked="" type="checkbox"/> RG4001M2 | as above - black |
| <input type="checkbox"/> RW4001M2L | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 2 modules - white |
| <input checked="" type="checkbox"/> RG4001M2L | as above - black |
| <input type="checkbox"/> RW4001LS | 1P 16 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - boiler symbol - white |
| <input checked="" type="checkbox"/> RG4001LS | as above - black |
| <input type="checkbox"/> RW4001LP | 1P 16 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - heater symbol - white |
| <input checked="" type="checkbox"/> RG4001LP | as above - black |
| <input type="checkbox"/> RW4001LR | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - fan symbol - white |
| <input checked="" type="checkbox"/> RG4001LR | as above - black |
| <input type="checkbox"/> RW4001LA | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - lamp symbol - white |
| <input checked="" type="checkbox"/> RG4001LA | as above - black |
| <input type="checkbox"/> RW4002L | 2P 16 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4002L | as above - black |



| Item | TWO-WAY SWITCHES |
|---|---|
| <input type="checkbox"/> RW4003 | 1P 10 AX - 250 Va.c. - 1 module - white |
| <input checked="" type="checkbox"/> RG4003 | as above - black |
| <input type="checkbox"/> RW4003L | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4003L | as above - black |
| <input type="checkbox"/> RW4003M2 | 1P 10 AX - 250 Va.c. - 2 modules - white |
| <input checked="" type="checkbox"/> RG4003M2 | as above - black |
| <input type="checkbox"/> RW4003M2L | 1P 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 2 modules - white |
| <input checked="" type="checkbox"/> RG4003M2L | as above - black |



| Item | FOUR-WAY SWITCHES |
|---|--|
| <input type="checkbox"/> RW4004 | intermediate switch 10 AX - 250 Va.c. - 1 module - white |
| <input checked="" type="checkbox"/> RG4004 | as above - black |
| <input type="checkbox"/> RW4004L | intermediate switch 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4004L | as above - black |
| <input type="checkbox"/> RW4004M2 | intermediate switch 10 AX - 250 Va.c. - 2 modules - white |
| <input checked="" type="checkbox"/> RG4004M2 | as above - black |
| <input type="checkbox"/> RW4004M2L | intermediate switch 10 AX - 250 Va.c. - lightable with led lamp 230 V included - 2 modules - white |
| <input checked="" type="checkbox"/> RG4004M2L | as above - black |

CLASSIA

Switches



RW4005



RG4005



RW4005L



RG4005L



RW4005M2



RG4005M2



RW4005M2L



RG4005M2L



RW4042V230



RG4042V230



RW4042V12



RG4042V12



RW4043



RG4043



R4040

Item

PUSHBUTTONS

| | |
|---|--|
| <input type="checkbox"/> RW4005 | 1P (NO) 10 A - 250 Va.c. - 1 module - white |
| <input checked="" type="checkbox"/> RG4005 | 1P (NO) 10 A - 250 Va.c. - 1 module - black |
| <input type="checkbox"/> RW4005L | 1P (NO) 10 A - 250 Va.c. - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4005L | as above - black |
| <input type="checkbox"/> RW4005M2 | 1P (NO) 10 A - 250 Va.c. - 2 modules - white |
| <input checked="" type="checkbox"/> RG4005M2 | as above - black |
| <input type="checkbox"/> RW4005M2L | 1P (NO) 10 A - 250 Va.c. - lightable with led lamp 230 V included - 2 modules - white |
| <input checked="" type="checkbox"/> RG4005M2L | as above - black |
| <input type="checkbox"/> RW4042V230 | 1P (NO) 10 A - 250 Va.c. - bell symbol - lightable with led lamp 230 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4042V230 | as above - black |
| <input type="checkbox"/> RW4042V12 | 1P (NO) 10 A - 250 Va.c. - bell symbol - lightable with led lamp 12/24 V included - 1 module - white |
| <input checked="" type="checkbox"/> RG4042V12 | as above - black |
| <input type="checkbox"/> RW4043 | pushbutton 1P (NO) 10A - 250 Va.c. lamp symbol - lightable with led lamp 230 V included - white |
| <input checked="" type="checkbox"/> RG4043 | as above - black |
| <input type="checkbox"/> R4040 | pushbutton 1P (NO) 10A with nameplate lightable with led lamp (not included) - 2 modules |
| <input type="checkbox"/> LN4742V230T | lamp with led for light signalling 230 Va.c. - white |
| <input type="checkbox"/> LN4742V12T | lamp with led for light signalling 12/24 Va.c. - white |



RW4001B3



RW4001B4

OTHER SWITCHES

| | |
|--|---|
| <input type="checkbox"/> RW4001B3 | bathroom switch with indication for three independent circuits 10/2x16 AX 250 Va.c. (light, heater, boiler) |
| <input type="checkbox"/> RW4001B4 | bathroom switch with indication for four independent circuits 2x10/2x16 AX 250 Va.c. (light, fan, heater, boiler) |



RW4431



RG4431



RW4037



RG4037



RW4027



RG4027

RW4431

switch with passive infrared motion sensor suitable for all types of load including LED lamps - 3 wires - twilight circuit with variable threshold with the possibility of exclusion - timing circuit for delayed switch-off adjustable from 30 seconds to 10 minutes - 230 Va.c. power supply - 1 module - white

RG4431

as above - black

RW4037

double 1P (NO) + 1P (NO) 10A - 250Va.c. interlocked - 1 module - white

RG4037

as above - black

RW4027

changeover switch 1P 10 A - 250 Va.c. - 1 module - white

RG4027

as above - black

SHUTTER SWITCHES

| | |
|---|--|
| <input type="checkbox"/> RW4037 | double 1P (NO) + 1P (NO) 10A - 250Va.c. interlocked - 1 module - white |
| <input checked="" type="checkbox"/> RG4037 | as above - black |
| <input type="checkbox"/> RW4027 | changeover switch 1P 10 A - 250 Va.c. - 1 module - white |
| <input checked="" type="checkbox"/> RG4027 | as above - black |

CLASSIA

Dimmers



RW4402



RG4402



RW4411



RG4411

DIMMER

| | |
|---|--|
| <input type="checkbox"/> RW4402 | rotary dimmer 40 - 400 W 230 V a.c. - 2 modules - white |
| <input checked="" type="checkbox"/> RG4402 | as above - black |
| <input type="checkbox"/> RW4411 | universal dimmer (resistive – inductive, capacitive, fluorescent compact and dimmer LEDs) - 150/200/400 W with electronic protection - 2 modules - white |
| <input checked="" type="checkbox"/> RG4411 | as above - black |

Loads

| Item | Type | Range (V a.c.) | Supply std | Incandescents and halogens | Halogen with ferromagnetic transformer | Halogen with electronic transformer | Dimmable compact fluorescents | Dimmable LED lamps |
|--------------------------------|-----------|----------------------|--------------------------|----------------------------|--|-------------------------------------|-------------------------------|-----------------------|
| | | | | | | | | |
| RW4402 RG4402 | Resistive | 230 50 | 230 V a.c. | 40 ÷ 400 W | | | | |
| RW4411 RG4411 | Universal | 100 ÷ 240 50 ÷ 60 | 230 V a.c. 100 V a.c. | 3 ÷ 200 W 3 ÷ 400 W | 3 ÷ 200 VA 3 ÷ 400 VA | 3 ÷ 200 VA 3 ÷ 400 VA | 3 ÷ 75 W 3 ÷ 150 W | 3 ÷ 75 W 3 ÷ 150 W |

Socket outlets



RW4141



RG4141



R4141A



R4141R



R4141V



RW4141C



RG4141C

GERMAN STANDARD

| | |
|--|--|
| <input type="checkbox"/> RW4141 | socket 2P+E 16A 250 V a.c. - socket with earth side contacts - shielded tulip contacts - white |
| <input checked="" type="checkbox"/> RG4141 | as above - black |
| <input type="radio"/> R4141A | as above - orange |
| <input type="radio"/> R4141R | as above - red |
| <input type="radio"/> R4141V | as above - green |
| <input type="checkbox"/> RW4141C | socket 2P+E 16A 250 V a.c. - socket with earth side contacts - shielded tulip contacts, with IP20 flap - white |
| <input checked="" type="checkbox"/> RG4141C | as above - black |

CLASSIA

Socket outlets



RW4180



RG4180



R4180R



RW4113



RG4113



RW4140A16



RG4140A16



R4140A16R



RW4125



RG4125



RW4183



RG4183



R4183R



RW4287C2



RG4287C2



RW4286C2



RG4286C2

ITALIAN STANDARD

| | |
|--|---|
| <input type="checkbox"/> RW4180 | 2P+E 16 A 250 Va.c. socket - center distance 19 mm and 26 mm - shielded tulip contacts - for plugs 2P and 2P+E 10 and 16 A Italian standard - white |
| <input checked="" type="checkbox"/> RG4180 | as above - black |
| <input type="radio"/> R4180R | as above - red |
| <input type="checkbox"/> RW4113 | socket 2P+E 10A 250 Va.c. -type earth side contacts - shielded socket contacts - white |
| <input checked="" type="checkbox"/> RG4113 | as above - black |
| <input type="checkbox"/> RW4140A16 | socket 2P+E 10A and 16A 250 Va.c. 19 mm and 26 mm center distance, 2-center socket configuration protected socket contacts; earth side contacts for German standard plugs; suitable for Italian standard plugs 2P and 2P+E 10/16A, German standard plugs 2P+E 16A - white |
| <input checked="" type="checkbox"/> RG4140A16 | as above - black |
| <input type="radio"/> R4140A16R | as above - red |

EURO-AMERICAN STANDARD

| | |
|---|---|
| <input type="checkbox"/> RW4125 | socket 2P 16 A 127/250 Va.c. - shielded holes - white |
| <input checked="" type="checkbox"/> RG4125 | as above - black |

ISRAELI STANDARD

| | |
|---|------------------------------------|
| <input type="checkbox"/> RW4183 | socket 2P+E 16 A 250 Va.c. - white |
| <input checked="" type="checkbox"/> RG4183 | as above - black |
| <input type="radio"/> R4183R | as above - red |

USB CHARGER

| | |
|---|---|
| <input type="checkbox"/> RW4287C2 | 5 Vdc USB charger TYPE A and C for quick charge of one single electronic device (mobile phones, smartphones, tablets or similar) up to 3000 mA or simultaneous charging of two devices up to 1500 mA- 110÷230 Va.c. 50÷60 Hz power supply - 2 modules - white |
| <input checked="" type="checkbox"/> RG4287C2 | as above - black |
| <input type="checkbox"/> RW4286C2 | 5 Vdc USB charger TYPE C for quick charge of one single electronic device (mobile phones, smartphones, tablets or similar) up to 3000 mA or simultaneous charging of two devices up to 1500 mA- 110÷230 Va.c. 50÷60 Hz power supply - 2 modules- white |
| <input checked="" type="checkbox"/> RG4286C2 | as above - black |

CLASSIA

TV sockets

| | |
|---|---|
|  |  |
| RW4202D | RG4202D |
|  |  |
| RW4202P10 | RG4202P10 |
|  |  |
| RW4202P14 | RG4202P14 |
|  |  |
| RW4217M2D | RG4217M2D |
|  |  |
| RW4217M2P10 | RG4217M2P10 |
|  |  |
| RW4217M2P14 | RG4217M2P14 |
|  |  |
| RW4210M2D | RG4210M2D |
|  |  |
| RW4202F | RG4202F |

TV SOCKETS

| | |
|--|--|
| <input type="checkbox"/> RW4202D | star coaxial socket for single-user aerial systems, also remote powered and centralised, and single-user / centralised satellite systems with current and signal transfer for channels selection; shielded connection clamps with captive screws - Ø 9.5 mm; male connector - 1 module - white |
| <input checked="" type="checkbox"/> RG4202D | as above - black |
| <input type="checkbox"/> RW4202P10 | terminal coaxial socket, -10dB attenuation, for centralised TV systems, also remote powered, and centralised satellite systems with current and signal transfer for channels selection; shielded connection clamps with captive screws - Ø 9.5 mm - male connector - incorporated impedance final adapter 75 Ω - 1 module - white |
| <input checked="" type="checkbox"/> RG4202P10 | as above - black |
| <input type="checkbox"/> RW4202P14 | passthrough coaxial socket, -14dB attenuation, for centralised TV systems, also remote powered, and centralised satellite systems with current and signal transfer for channels selection - shielded connection clamps with captive screws - Ø 9.5 mm; male connector - 1 module - white |
| <input checked="" type="checkbox"/> RG4202P14 | as above - black |
| <input type="checkbox"/> RW4217M2D | star demixed coaxial socket for single-user aerial systems, also remote powered and shunting centralized, and for single-user / shunting centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - 2 modules - white |
| <input checked="" type="checkbox"/> RG4217M2D | as above - black |
| <input type="checkbox"/> RW4217M2P10 | terminal demixed coaxial socket, -10dB attenuation, for centralized TV systems, also remote powered, and centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - incorporated impedance final adapter 75 Ω - 2 modules - white |
| <input checked="" type="checkbox"/> RG4217M2P10 | as above - black |
| <input type="checkbox"/> RW4217M2P14 | passthrough demixed coaxial socket, -14dB attenuation, for centralized TV systems, also remote powered, and centralized satellite systems with current and signal transfer for channels selection; Ø 9.5 mm; male connector - type F SAT connector - 2 modules - white |
| <input checked="" type="checkbox"/> RG4217M2P14 | as above - black |
| <input type="checkbox"/> RW4210M2D | star demixed coaxial socket for single-user aerial systems, also remote powered and shunting centralised, and for single-user/shunting centralised satellite systems with current and signal transfer for channels selection, and for radio systems; Ø 9.5 mm male TV connector - type F SAT connector and female radio Ø 9.5 mm - 2 modules - white |
| <input checked="" type="checkbox"/> RG4210M2D | as above - black |
| <input type="checkbox"/> RW4202F | type-F coaxial socket - impedance 75 ohm - screw hook - 1 module - white |
| <input checked="" type="checkbox"/> RG4202F | as above - black |

CLASSIA

Telephone and data sockets

| | | | |
|--|---|---|---|
|  |  |  |  |
| RW4258RJ11 | RG4258RJ11 | RW4238 | RG4238 |
|  |  |  |  |
| RW4279C5E | RG4279C5E | RW4279C6 | RG4279C6 |
|  |  |  |  |
| RW4279C6S | RG4279C6S | RW4279C6AS | RG4279C6AS |

| Item | RJ CONNECTORS |
|--|--|
| <input type="checkbox"/> RW4258RJ11 | RJ11 connector type K10 - 1 module - white |
| <input checked="" type="checkbox"/> RG4258RJ11 | as above - black |
| <input type="checkbox"/> RW4238 | telephone socket - ISRAELI standard - 1 module - white |
| <input checked="" type="checkbox"/> RG4238 | as above - black |
| <input type="checkbox"/> RW4279C5E | RJ45 toolless UTP cat5E - 1 module - white |
| <input checked="" type="checkbox"/> RG4279C5E | as above - black |
| <input type="checkbox"/> RW4279C6 | RJ45 toolless UTP cat6 - 1 module - white |
| <input checked="" type="checkbox"/> RG4279C6 | as above - black |
| <input type="checkbox"/> RW4279C6S | RJ45 toolless STP cat6 - 1 module - white |
| <input checked="" type="checkbox"/> RG4279C6S | as above - black |
| <input type="checkbox"/> RW4279C6AS | RJ45 toolless STP cat6A - 1 module - white |
| <input checked="" type="checkbox"/> RG4279C6AS | as above - black |

Optical and acoustic signallings

| | |
|--|---|
|  |  |
| RW4351V230 | RG4351V230 |
|  |  |
| RW4356V230 | RG4356V230 |

| Item | BELLS AND BUZZERS |
|--|---|
| <input type="checkbox"/> RW4351V230 | bronze bell 230 Va.c. 8 VA - 1 module - white |
| <input checked="" type="checkbox"/> RG4351V230 | as above - black |
| <input type="checkbox"/> RW4356V230 | buzzer 230 Va.c. 8 VA - 1 module - white |
| <input checked="" type="checkbox"/> RG4356V230 | as above - black |

| | | | |
|--|---|---|---|
|  |  |  |  |
| R4380 | | | 4380NB |

| REMOVABLE LED LAMP | |
|------------------------------|---|
| <input type="radio"/> R4380 | It automatically turns on in the case of power failure. Push & Pull extracting system - high efficiency white LED - ON / OFF switch and SPOT button to increase light intensity if needed - interchangeable Ni-MH batteries with 2h duration - low consumption in stand-by 0,4W - 127 / 230V power supply. Recharging base, 2 modules - cover included. |
| <input type="radio"/> 4380NB | spare battery for removable led lamp R4380 |

Blanking modules

| | | | |
|--|---|---|---|
|  |  |  |  |
| RW4950 | RG4950 | RW4953 | RG4953 |

| Item | BLANKING MODULES AND OUTPUTS |
|--|---|
| <input type="checkbox"/> RW4950 | blank plate - 1 module - white |
| <input checked="" type="checkbox"/> RG4950 | as above - black |
| <input type="checkbox"/> RW4953 | simple output ø 9.5 mm - 1 module - white |
| <input checked="" type="checkbox"/> RG4953 | as above - black |

CLASSIA

Hotel offer



RW4033



RG4033

| Item | PULL-CORD PUSHBUTTON |
|--|--|
| <input type="checkbox"/> RW4033 | 1 P (NO) 10 A - 250 V a.c. with cord-pull - 1 module - white |
| <input checked="" type="checkbox"/> RG4033 | as above - black |



RW4028H



RG4028H

| MAKE UP THE ROOM / DO NOT DISTURB | |
|---|--|
| <input type="checkbox"/> RW4028H | 1P 10 A – 250 Vac double-key changeover switch 1-0-2 with interlock and double signalling: "do not disturb" and "make up the room". 1 module - white |
| <input checked="" type="checkbox"/> RG4028H | as above - black |
| <input type="checkbox"/> RW4373H | lampholder with double optical signalling: "do not disturb" and "rearrange the room" - 1 module - white |
| <input checked="" type="checkbox"/> RG4373H | as above - black |



RW4373H



RG4373H



RW4139



RG4139

| MULTISTANDARD SOCKETS | |
|--|---|
| <input type="checkbox"/> RW4139 | socket 2P+E 5/6/10/13 A 250 V a.c. and 127 V a.c., multistandard - 5 A and 13 A = BS std; 6 A = Indian std., 10 A = European std. - white |
| <input checked="" type="checkbox"/> RG4139 | as above - black |



RW4177



RG4177

| SHAVER SOCKETS | |
|--|----------------------------|
| <input type="checkbox"/> RW4177 | shaver socket 230V - white |
| <input checked="" type="checkbox"/> RG4177 | as above - black |



RW4549



RG4549

| KEY FOB SWITCH | |
|--|--|
| <input type="checkbox"/> RW4549 | key fob switch to switch ON lights and devices in hotel rooms - slot light with built-in lamp - switch-off delay - max. load 30 VA 230 Vac - 2 modules - white |
| <input checked="" type="checkbox"/> RG4549 | as above - black |



RW4441



RG4441

| ROOM TEMPERATURE CONTROL | |
|--|--|
| <input type="checkbox"/> RW4441 | electronic room thermostat – relay output with 1 contact in switching 8 A 250 V a.c. - 230 V a.c. power supply – 50 and 60 Hz - 2 module - white |
| <input checked="" type="checkbox"/> RG4441 | as above - black |

COVER PLATES COLOURS

BASICS

White - **RW**Cream - **CR**Moka - **MK**Black - **BC**

FRAMES

Ice satin - **ES**Cream satin - **CS**White satin - **WS**Black satin - **BG**

FINISHES




Titanium metal - **TM**Siena soft - **SF**Blue metal - **LM**Terra soft - **TF**

ACCENTS

White gold - **WD**White chrome - **WR**Black nickel - **BH**Black gold - **BD**

COVER PLATES: TABLE FOR SELECTING CODE

Area Europa installation system

| SUPPORTS | | | | | | |
|---|---|---|--|---|---|---|
| | 1 centered | 2 | 2+2 "horizontal/vertical instal." | 2+2+2 "horizontal/vertical instal." | 2+2+2+2 "horizontal/vertical instal." | 2+2+2+2+2 "horizontal/vertical instal." |
| BASICS | | | | | | |
|  White | R4801RW | R4802RW | R4802M2RW | R4802M3RW | R4802M4RW | R4802M5RW |
|  Cream | R4801CR | R4802CR | R4802M2CR | R4802M3CR | R4802M4CR | R4802M5CR |
|  Moka | R4801MK | R4802MK | R4802M2MK | R4802M3MK | R4802M4MK | R4802M5MK |
|  Black | R4801BC | R4802BC | R4802M2BC | R4802M3BC | R4802M4BC | R4802M5BC |
| FRAMES | | | | | | |
|  Ice satin | R4801ES | R4802ES | R4802M2ES | R4802M3ES | R4802M4ES | R4802M5ES |
|  Cream satin | R4801CS | R4802CS | R4802M2CS | R4802M3CS | R4802M4CS | R4802M5CS |
|  White satin | R4801WS | R4802WS | R4802M2WS | R4802M3WS | R4802M4WS | R4802M5WS |
|  Black satin | R4801BG | R4802BG | R4802M2BG | R4802M3BG | R4802M4BG | R4802M5BG |
| FINISHES | | | | | | |
|  Titanium metal | R4801TM | R4802TM | R4802M2TM | R4802M3TM | R4802M4TM | R4802M5TM |
|  Siena soft | R4801SF | R4802SF | R4802M2SF | R4802M3SF | R4802M4SF | R4802M5SF |
|  Blue metal | R4801LM | R4802LM | R4802M2LM | R4802M3LM | R4802M4LM | R4802M5LM |
|  Terra soft | R4801TF | R4802TF | R4802M2TF | R4802M3TF | R4802M4TF | R4802M5TF |
| ACCENTS | | | | | | |
|  White gold | R4801WD | R4802WD | R4802M2WD | R4802M3WD | R4802M4WD | R4802M5WD |
|  White chrome | R4801WR | R4802WR | R4802M2WR | R4802M3WR | R4802M4WR | R4802M5WR |
|  Black nickel | R4801BH | R4802BH | R4802M2BH | R4802M3BH | R4802M4BH | R4802M5BH |
|  Black gold | R4801BD | R4802BD | R4802M2BD | R4802M3BD | R4802M4BD | R4802M5BD |
| FRAME | | | | | | |
|  R4702G with clips | R4702G with clips |  R4702 with screws |  2 x R4702G with clips |  3 x R4702G with clips |  4 x R4702G with clips |  5 x R4702G with clips |
|  R4702 with screws |  R4702 with screws |  2 x R4702 with screws |  3 x R4702 with screws |  4 x R4702 with screws |  5 x R4702 with screws |  5 x R4702 with screws |

Area Italian installation system

| SUPPORTS | | | | | |
|--|---------------|---------------|---------|---------|---------|
| | 1 centered | 2 centered | 3 | 4 | 7 |
| BASICS | | | | | |
|  White | R4803M1RW | R4819RW | R4803RW | R4804RW | R4807RW |
|  Cream | R4803M1CR | R4819CR | R4803CR | R4804CR | R4807CR |
|  Moka | R4803M1MK | R4819MK | R4803MK | R4804MK | R4807MK |
|  Black | R4803M1BC | R4819BC | R4803BC | R4804BC | R4807BC |
| FRAMES | | | | | |
|  Ice satin | R4803M1ES | R4819ES | R4803ES | R4804ES | R4807ES |
|  Cream satin | R4803M1CS | R4819CS | R4803CS | R4804CS | R4807CS |
|  White satin | R4803M1WS | R4819WS | R4803WS | R4804WS | R4807WS |
|  Black satin | R4803M1BG | R4819BG | R4803BG | R4804BG | R4807BG |
| FINISHES | | | | | |
|  Titanium metal | R4803M1TM | R4819TM | R4803TM | R4804TM | R4807TM |
|  Siena soft | R4803M1SF | R4819SF | R4803SF | R4804SF | R4807SF |
|  Blue metal | R4803M1LM | R4819LM | R4803LM | R4804LM | R4807LM |
|  Terra soft | R4803M1TF | R4819TF | R4803TF | R4804TF | R4807TF |
| ACCENTS | | | | | |
|  White gold | R4803M1WD | R4819WD | R4803WD | R4804WD | R4807WD |
|  White chrome | R4803M1WR | R4819WR | R4803WR | R4804WR | R4807WR |
|  Black nickel | R4803M1BH | R4819BH | R4803BH | R4804BH | R4807BH |
|  Black gold | R4803M1BD | R4819BD | R4803BD | R4804BD | R4807BD |
| FRAME | | | | | |
| | R4703 | R4703 | R4703 | R4704 | R4707 |

CLASSIA

Area Europa installation system (71 mm center distance)

SELECTION TABLE

| | | | | | | |
|--|--|--|--|--|--|--|
| Installation with CLIPS (masonry) | | | | | | |
| | | | | | | |
| Installation with SCREW (masonry and plasterboard) | | | | | | |
| | | | | | | |
| No. of modules | | | | | | |
| Cover plates | | | | | | |

Area Italian installation system

SELECTION TABLE

| | | | | | |
|--------------------|--|--|--|--|--|
| Masonry | | | | | |
| Plasterboard boxes | | | | | |
| Frames | | | | | |
| No. of modules | | | | | |
| Cover plates | | | | | |

The frame can be installed on all the market boxes.

CLASSIA IP55 waterproof covers

DESCRIPTION

2 modules



27602

DESCRIPTION

3 modules



27603

DESCRIPTION

4 modules



27604

IP40 wall-mounting enclosures

DESCRIPTION

1 module



27401

DESCRIPTION

2 modules



27402

DESCRIPTION

3 modules



27403

4 modules



27404

IP55 wall-mounting enclosures

DESCRIPTION

1 module



27501

DESCRIPTION

2 modules



27502

DESCRIPTION

3 modules



27503

4 modules






27504

CLASSIA



Dimensional data

COVER PLATES

Area Europa installation system

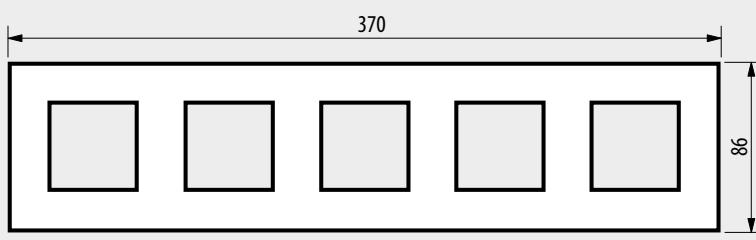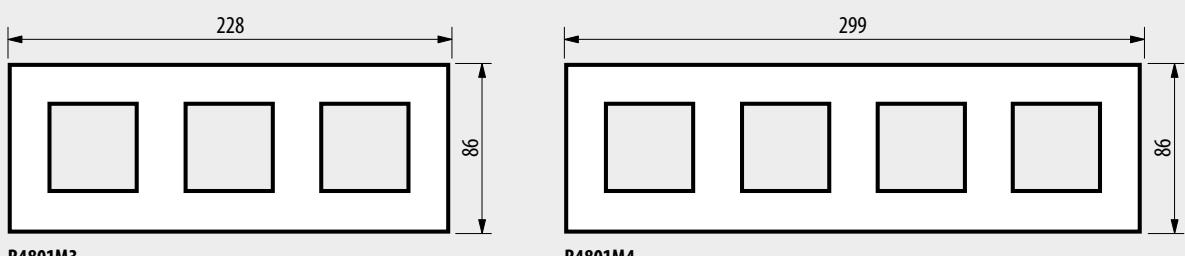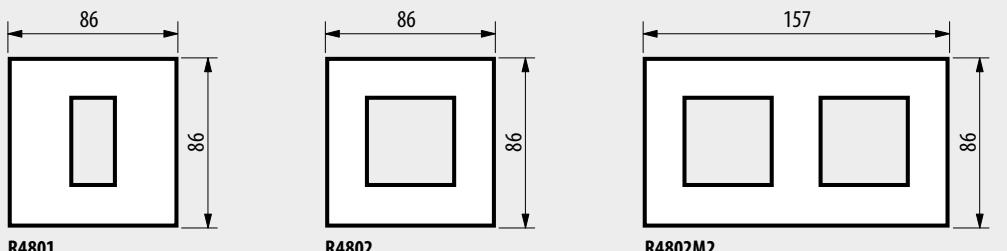

Area Italian installation system

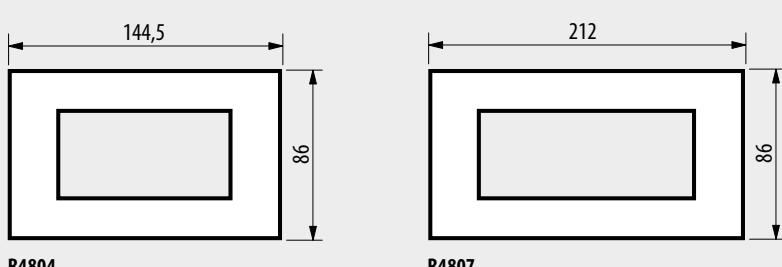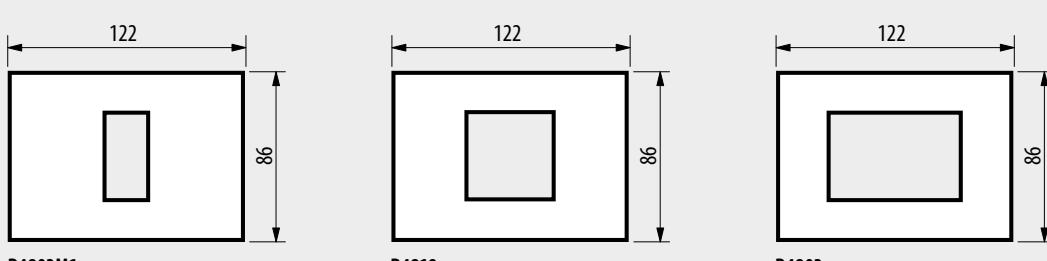


CLASSIA Packaging

It has been designed for both retail and DIY exposure:
each product has a single packaged



- Euroslot
- Security information inside on 11 languages
- Ean code
- Info for packaging recycling
- QR code for technical information

[Discover more](#)



bticino.com

BTicino SpA
Viale Borri, 231
21100 Varese - Italy
www.bticino.com

AD-EXCLS19C/GB - Version 01/2019

BTicino SpA reserves at any time the right to modify the contents of this booklet and to communicate, in any form and modality, the changes brought to the same.